

FEATURES:

- Wide input range
- Continuous short-circuit protection, self recover
- I/O isolation voltage 1.5KV
- Working temperature: -40℃~+105℃
- No additional components required
- Stable performance and high reliability (MTBF≥2 million hours)
- Industry standard pin-out
- DIP package



Selection Guide

Part No.	INPUT		OUTPUT				CapacitiveLoad(μF)
	Normal (Vdc)	Range (Vdc)	Voltage (V1dc)	current (A)	Voltage (V2dc)	current (A)	
LD400H-96S12	96	9-18	12	33.3			
LD400H-96S15			15	26.7			
LD400H-96S24			24	16.7			
LD400H-96S28			28	14.3			
LD400H-96S48			48	8.3			
LD400H-110S12	110	82-180	12	33.3			
LD400H-110S15			15	26.7			
LD400H-110S24			24	16.7			
LD400H-110S28			28	14.3			
LD400H-110S48			48	8.3			
LD400H-300S12	300	200-400	12	33.3			
LD400H-300S15			15	26.7			
LD400H-300S24			24	16.7			
LD400H-300S28			28	14.3			
LD400H-300S48			48	8.3			

customized accepted ,pls contact sales for details

Input Specifications

Input Voltage Range	Input Voltage Range (Vdc)	Nom(Vdc)	Max (Vdc)
	65-150	96	150
	82-180	110	180
	200-400	300	400
Input Filter	Capacitive Filter		
Ctrl	NONE		
	NONE		
Hot Plug	Unavailable		

Output Specifications

Item	Min	Typ	Max	Test Conditions
Voltage Accuracy		±1%	±3%	
Line Regulation		±0.2%	±1%	


Load Regulation		$\pm 0.5\%$	$\pm 1\%$	
TRIM Range			$\pm 10\%$	
Temperature Regulation		$\pm 0.02\%/^{\circ}\text{C}$		
Over Current Protect	110%		160%	
Over Voltage Protect	110%		140%	
Over Temperature Protect	110%	115%	125%	
Short Circuit Protect	Continuous, self-recovery			
Dynamic Response	4%Vo Pk deviation 100 μ S settling time		50~75% load 50~25% load	

General Specifications

Isolation Resistor	20M Ω	Input-Output
Isolation Voltage	1500VDC	Input-Output
	1000VDC	Input-Case
	500VDC	Output-Case
Switching Frequency	300KHz	Mil HDBK 217F Tc=25 $^{\circ}\text{C}$
MTBF	1 $\times 10^6$ Hrs	
Case Temperature	-40~+100 $^{\circ}\text{C}$	
Storage Temperature	-55~+125 $^{\circ}\text{C}$	
Relative Humidity	10%-90%	
Pin Solder Temperature	250 $^{\circ}\text{C}$	Soldering spot is 1.5mm away from case for 10 seconds
Hand Soldering Time	5s	Iron Temperature 425 $^{\circ}\text{C}$
Vibration		Sine, 10Hz-55Hz, amplitude 0.35mm, X, Y, Z three directions 30min each
Shock		Half-sine, peak acceleration is 300m/s ² , standard pulse duration is 6ms, X, Y, Z three 6 consecutive shocks in each direction;
Weight	300g (Typ)	

**Unless specified, otherwise all other parameters are tested under the following conditions: nominal input voltage, pure resistive load, 25 $^{\circ}\text{C}$ room temperature environment.

Dimensions and Recommended Layout

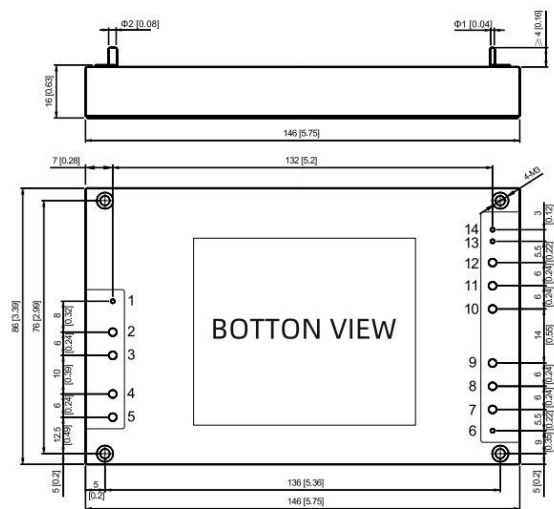


Unit:mm(inch)

Pins


Pin-Out	Mark		
1	CTL	8	+Vout
2	-Vin	9	+Vin
3	-Vin	10	-Vout
4	+Vin	11	-Vout
5	+Vin	12	-Vout
6	+S	13	-S
7	+Vout	14	TRIM

Recommended Circuit

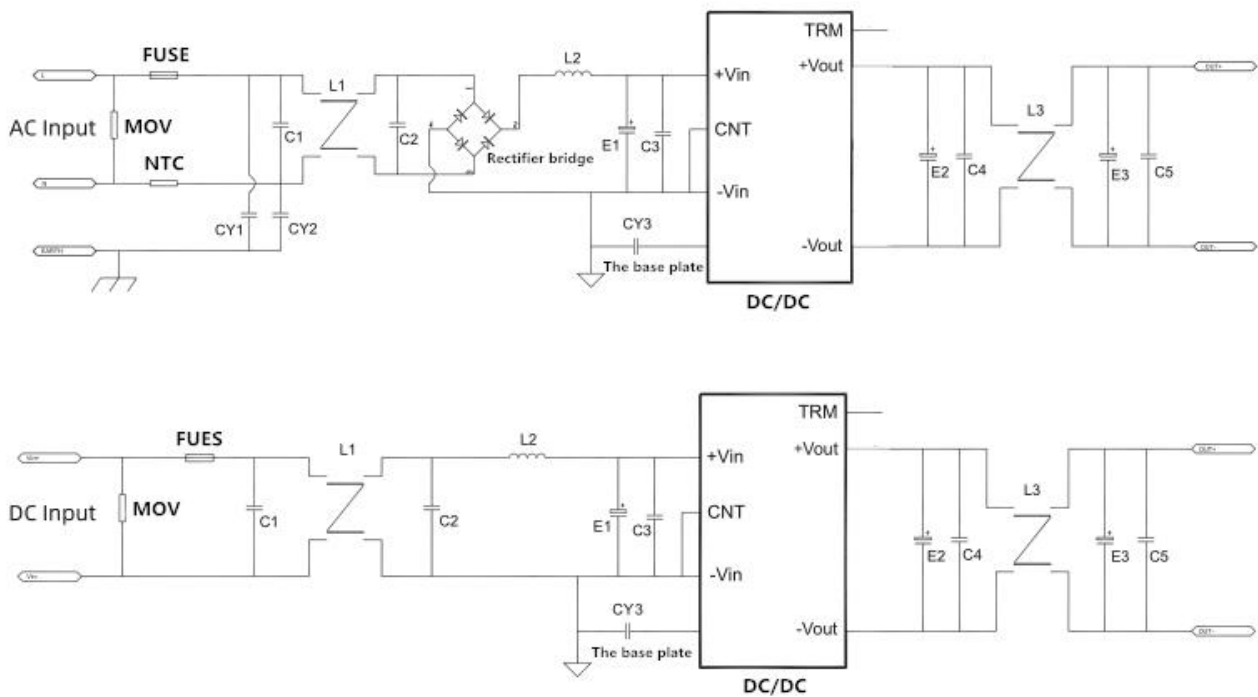

Rated Voltage	Fuse	MOV	bridge rectifier	NTC	C1/C2/C3	CY1/CY2/CY3	E1	E2/E3	C4/C5	L1	L2	L3
110V	20A	300V	40A	4Ω/Φ20	105/200V	472/3KV	1000uF/200V	35V/220uF	105/50V	5~10mH	3uH	200uH
220V	10A	560V	20A	5Ω/Φ20	105/400V	472/3KV	1000uF/400V	35V/220uF	105/50V	5~10mH	3uH	200uH

TRIM

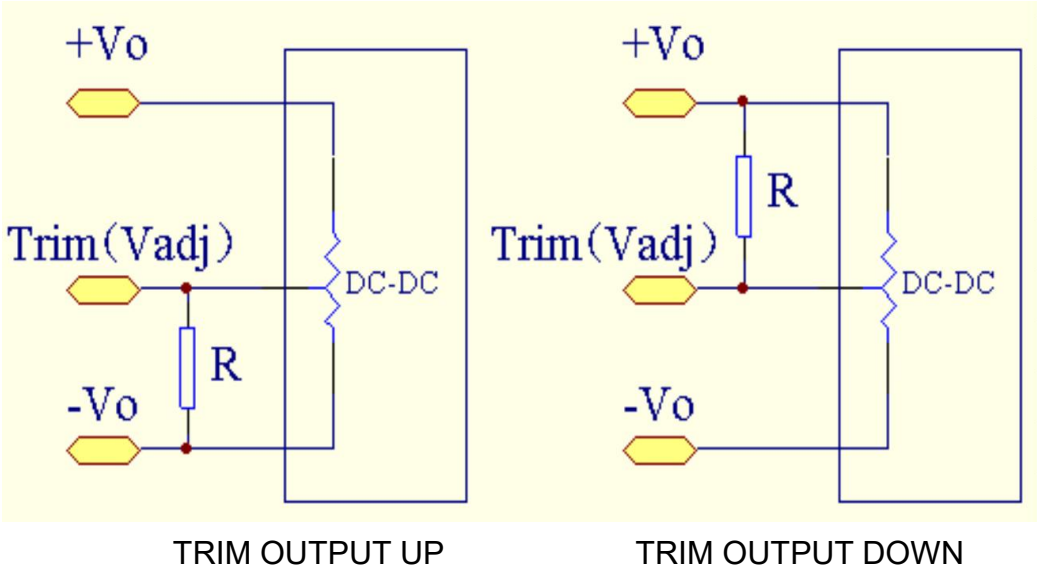

Noted

1. Input current: Ensure that the output current of the power supply meets the instantaneous starting current of the power module (that is, twice the average input current of the power module).
2. Output load requirements: Avoid no-load use. When the actual power consumption of the load is less than 10% of the rated output power of the module or no load occurs, connect an external resistance to the output end (the sum of the external resistance and the load power is greater than or equal to 10% of the rated load) or select a module with a smaller rated power.
3. The external capacitance of the output end should not be too large; otherwise, the module may be overcurrent or poorly started. For details, see the external capacitance recommendation table.
4. External LC filter circuit can be connected for occasions with high ripple noise requirements.