

FEATURES:

- Wide input range: 85-500VAC
- Short-circuit protection,self recover
- Efficiency(typ):85%
- Switching frequency: 65Khz
- Overload protection
- Plactics case
- PCB mount



Selection Guide

Part No.	INPUT		OUTPUT				CapacitiveLoad(μF)
	Normalal (Vac)	Range (Vac)	Voltage (V1dc)	current (mA)	Voltage (V2dc)	current (mA)	
LA20-400S09B	400	85-500	9	2200			
LA20-400S12B			12	1700			
LA20-400S15B			15	1300			
LA20-400S20B			20	1000			
LA20-400S24B			24	800			

customized accepted,pls contact sales for details

Input Specifications

Input Voltage Range	Input Voltage Range (Vac)	nominal input voltage	Max (Vac)
	85-500	400	500
Input Filter	Capacitive Filter		
Ctrl	NONE		
	NONE		
Hot Plug	Unavailable		

Output Specifications

Item	Typ	Max	Test Conditions
Voltage Accuracy	±1%		
Line Regulation	±0.1%		
Load Regulation	±1%		
Ripple&Noise	60mVp-p		20MHz Bandwidth, full load


General Specifications

Switching Frequency	65KHz(Typ)	100% full load, nominal input voltage
Short-Circuit Protection	Continuous, self-recovery	
Over Load Protection	>150% load,recover	
Isolation (Input-Output)	3000VAC	Input-output electric strength test for 1 minute with a leakage current
Operating Temperature	-25~+70℃	
Storage Temperature	-40~+85℃	
Storage Humidity	<95%	Non-condensing
Cooling Method	Free air convection	

Case Material	Plasitcs case	
Weight	76g (Typ)	

**Unless specified, otherwise all other parameters are tested under the following conditions: nominal input voltage, pure resistive load, 25℃ room temperature environment.

Dimensions and Recommended Layout

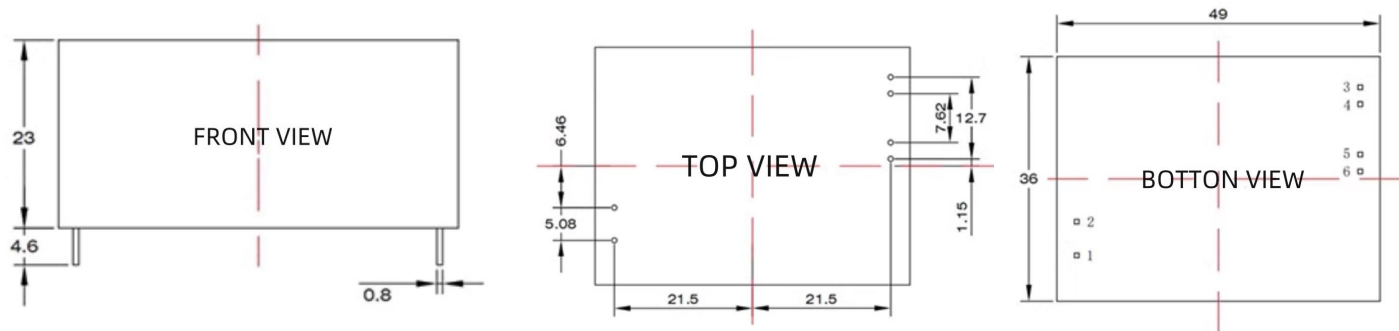

Unit:mm
Pin diameter tolerances:±0.2mm
General tolerances:±0.5mm

Pins				
Pin	Single			
1	N			
2	L			
3,4	+Vo			
5,6	-Vo			