

Typical Performance

FEATURES

- Wide Input voltage range (2:1)
- Typical Efficiency:85%
- Switching frequency: 300KHz
- Working temperature:-40~+85°C
- Output Over current protect,Short circuit protection
- input under voltage protection,over voltage protection
- input-output isolated
- PCB Board in-line type installs
- High reliability
- Optional heat sink



3-Years Product Warranty

Technology parameter Test condition:General Nominal Line,Tc=25°C, Rated resistant load unless other wispecified

| Input Features | Min | Nom | Max | Notes |
|---------------------|---------------------|-----|-----|-------|
| | Test condition | | | |
| Start voltage | 96V(65~150Vin) | | | 65V |
| | 110V(82~180Vin) | | | 82V |
| | 280V(200~400Vin) | | | 200V |
| Input voltage (Vdc) | 65 | 96 | 150 | W 2:1 |
| | 82 | 110 | 180 | W 2:1 |
| | 200 | 300 | 400 | W 2:1 |
| Start time | Not capacitive load | | | 20mS |

Remote On/Off Function

| | | | | |
|-----|----------------------|--|--|-----|
| CTL | CNT Pin connect -Vin | | | ON |
| | CNT Pin left open | | | OFF |

Output Feature

| | Test condition | | |
|-------------------------------|--|--|--------|
| Voltage accuracy | $I_o=0.1...1.0 \times I_{nom}, V_i=V_{rated}$ | | ±1.0% |
| Line regulation | $V_{imin} \leq V_i \leq V_{imax}$ | | ±0.2% |
| Load regulation | $I_o=0.1...1.0 \times I_{nom}, V_{imin} \leq V_i \leq V_{imax}, V_i=V_{rated}$ | | ±0.5% |
| Ripple&noise | 2-MHz Broadband | | 1% |
| Over current protection | $V_{imin} \leq V_i \leq V_{imax}$ | | 120% |
| Peak Deviation | 25% Rated Load Vary | | ±5.0% |
| Dynamic Response Setting Time | | | 400us |
| Output Voltage Trim | $V_{imin} \leq V_i \leq V_{imax}$ | | 10% |
| Switching frequency | $V_{imin} \leq V_i \leq V_{imax}$ | | 300KHz |

General Feature

| | Test condition | | |
|---------------------------------|---|---|-----------------------|
| Efficiency | | | 85% typical |
| Working environment temperature | Military level | | -25°C ~ +85°C |
| Max Board temperature | | | +105°C |
| Storage temperature | Military level | | -50°C ~ +105°C |
| Relative humidity | No condensation | | 5%~90%RH |
| Temperature coefficient | | | ±0.02%/°C |
| case material | | | aluminium baseplate |
| Isolated resistance | Input-Output | | 100M ohm |
| Vibration resistance | 10~55Hz | | 5G |
| Over current mode | Full input range | Protection type : Hiccup mode, recovers automatically | |
| Cooling | | Heatsink,nature cooling | |
| Case material | | epoxy,Aluminum base plate | |
| Isolated voltage | Input-output 1500Vdc; input-FG 1500Vdc,Output-FG 500Vdc | | |
| MTBF | MIL-HDBK-217F2 | | 5X10 ⁶ Hrs |

Product Nomination Method

| | | | |
|---------|--------------------------|---------|----------------------|
| example | L D 200 – H 48 S 12 | | |
| | ① ② ③ | ④ ⑤ ⑥ ⑦ | |
| ① | Wide input voltage: 2: 1 | ④ | H:high voltage input |



| | | | |
|---|----------------------------------|---|-----------------------|
| ② | Power adaptation mode: D (DC-DC) | ⑤ | Normal input voltage |
| ③ | Output power(W) | ⑥ | S=Single route output |
| ⑦ | output voltage | | |

Product Program


| PART # | Input voltage range | Output voltage / current | | | | |
|---------------|---------------------|--------------------------|-------|-----|---|--------------------|
| | | VO1 | | VO2 | | Typical Efficiency |
| | | V | A | V | A | |
| LD50H-96S05H | 96V(65~150V) | 5V | 10A | | | 79 |
| L50H-96S12H | | 12V | 4.17A | | | 82 |
| LD50H-96S15H | | 15V | 3.33A | | | 82 |
| LD50H-96S24H | | 24V | 2.08A | | | 83 |
| LD50H-96S28H | | 28V | 1.78A | | | 84 |
| LD50H-96S48H | | 48V | 1.04A | | | 84 |
| LD50H-110S05H | 110V(82~180V) | 5V | 10A | | | 79 |
| L50H-110S12H | | 12V | 4.17A | | | 82 |
| LD50H-110S15H | | 15V | 3.33A | | | 82 |
| LD50H-110S24H | | 24V | 2.08A | | | 83 |
| LD50H-110S28H | | 28V | 1.78A | | | 84 |
| LD50H-110S48H | | 48V | 1.04A | | | 84 |
| LD50H-300S05H | 300V(200~400V) | 5V | 10A | | | 80 |
| LD50H-300S12H | | 12V | 4.17A | | | 82 |
| LD50H-300S15H | | 15V | 3.33A | | | 82 |
| LD50H-300S24H | | 24V | 2.08A | | | 83 |
| LD50H-300S28H | | 28V | 1.78A | | | 84 |
| LD50H-300S48H | | 48V | 1.04A | | | 84 |

Recommended Circuit

| Rated voltage | Fuse | voltage dependent resistor | rectifier bridge | NTC | C1C2C3 | CY1CY2CY3 | E1 |
|---------------|------|----------------------------|------------------|--------|----------|-----------|------------|
| 110V | 2A | 300V | 5A | 12Ω/Φ9 | 105/200V | 472/3KV | 100μF/200V |
| 220V | 2A | 560V | 3A | 20Ω/Φ9 | 105/400V | 472/3KV | 100μF/400V |

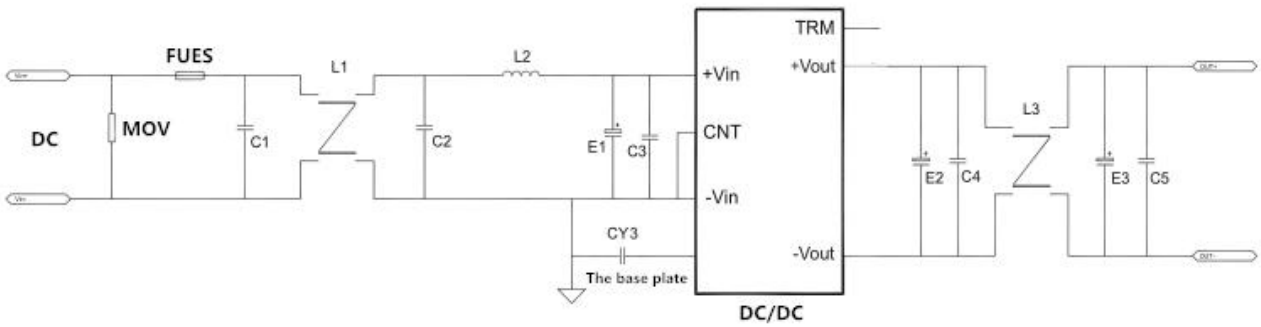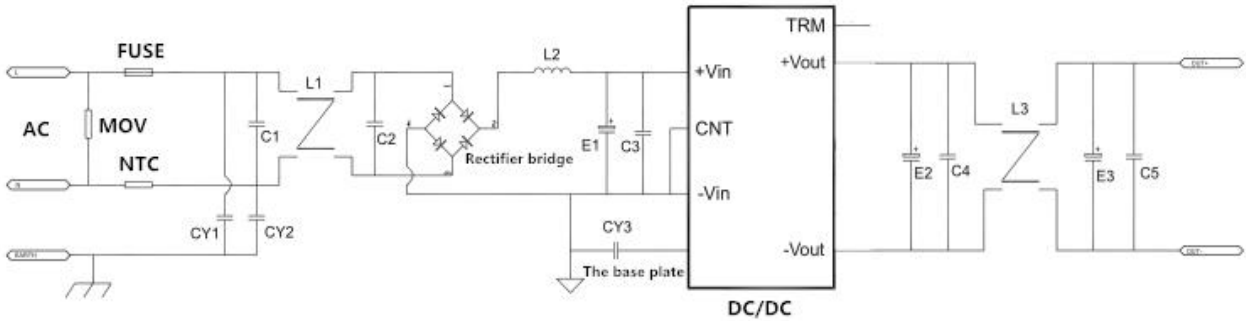


TRIM

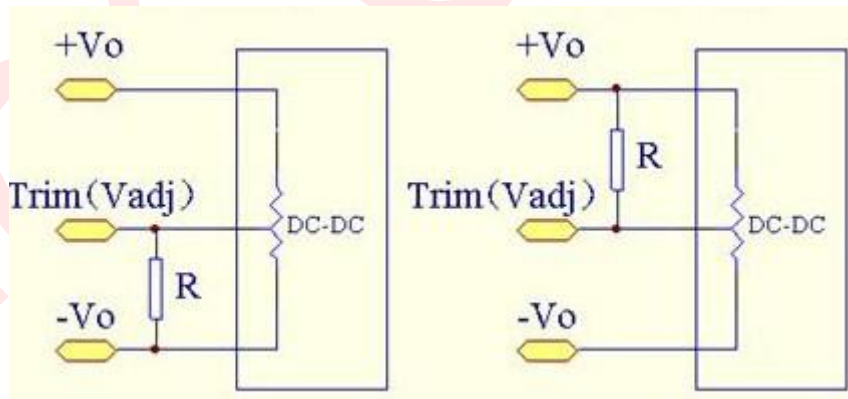


Raise output voltage

Low output voltage


Input voltage--Efficiency

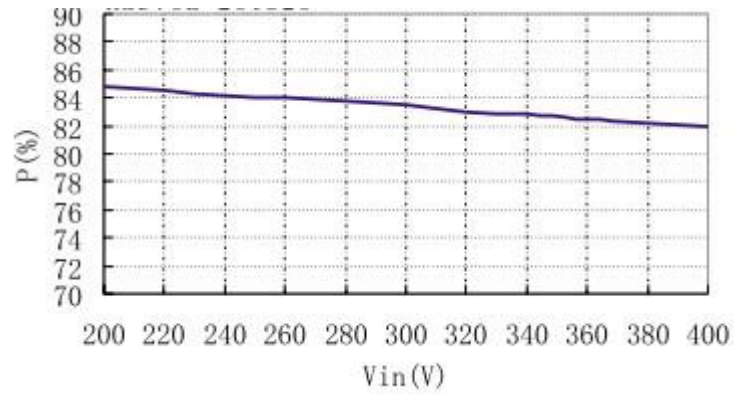


Output Load--Efficiency

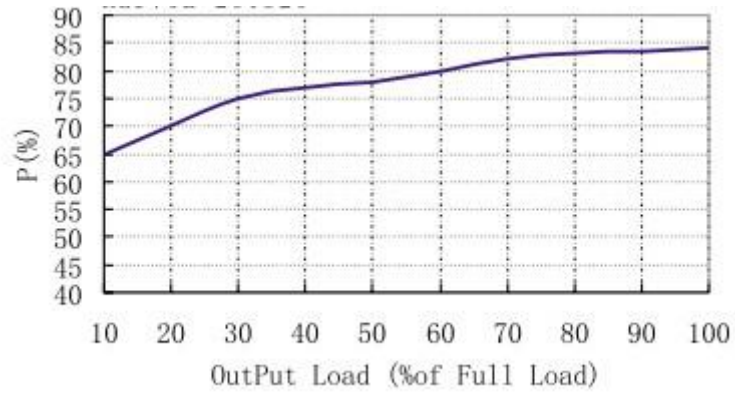

Temperature Curve

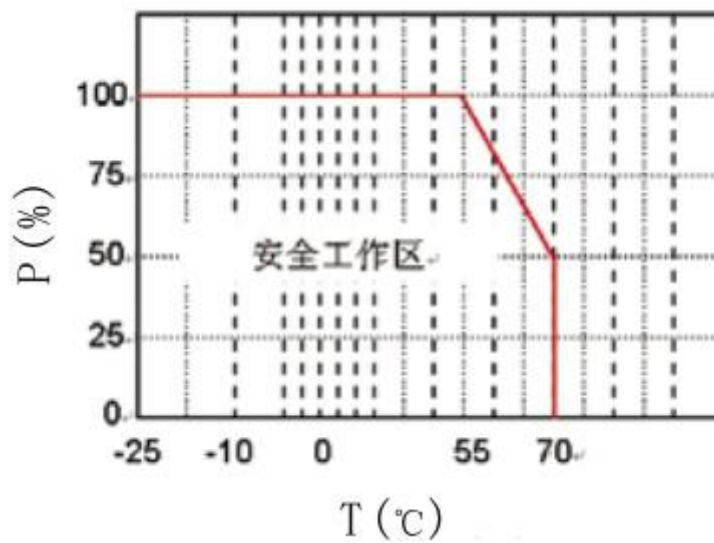

Mechanical Dimension

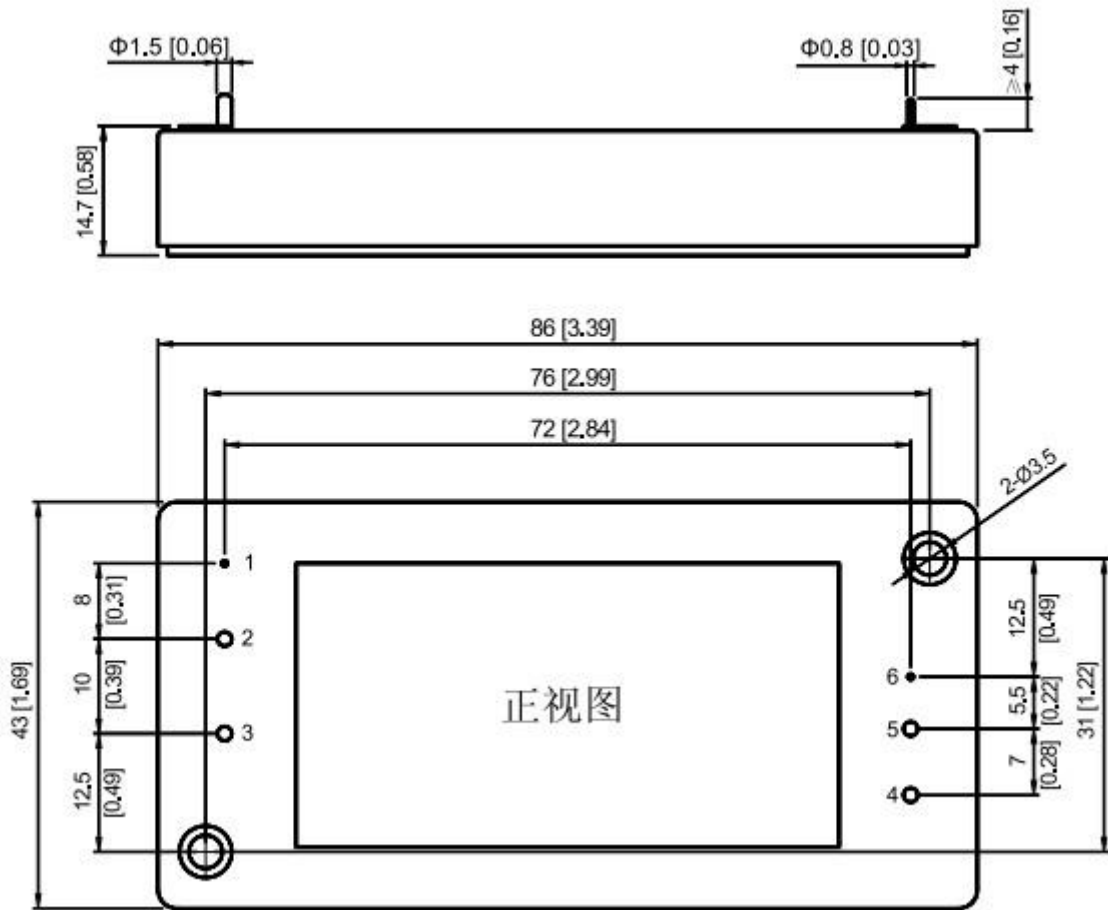

BOTTOM VIEW

Unit:mm(inch)

Tolerance:±0.2mm(±0.008inch)

Mechanical Data

| WATT | L x W x H | Packing No. |
|------|--------------|-------------|
| 50W | 86*43*14.7mm | |

Pin Assignment

| Pin | 1 | 2 | 3 | 4 | 5 | 6 | | | | |
|------------|-----|------|------|-------|-------|------|--|--|--|--|
| Single O/P | CTL | -Vin | +Vin | +Vout | -Vout | TRIM | | | | |

*Note: The power modules such as the definition of the pin does not match with the hand book,please refer to the actual item.