

Typical Performance

FEATURES

- Wide Input voltage range (2:1)
- Typical Efficiency:81%
- Switching frequency: 200KHz
- Short circuit protection,Self-furbish,input over voltage protection
- Input-output isolate 1500VDC
- Metal case, Low Output Ripple
- Chassis mount
- Silicone filling and sealing, dustproof,moistureproof, high reliability
- Optional heatsink



3-Years Product Warranty

Technology parameter

Test condition:General Nominal Line,Tc=25℃, Rated resistant load unless other wisepecified

Input Feature	Min	Nom	Max	Notes
Input voltage(Vdc)	9	12	18	W 2:1
	18	24	36	W 2:1
	36	48	72	W 2:1
	72	110	144	W 2:1

Output Feature

Voltage accuracy			±2.0%
Line regulation			±0.2%
Load regulation			±0.5%
Over current protection		120%~200% ,output will be turn off,self-recover	
Ripple and noise			100mV

General Feature

Efficiency			82% typical
Switching frequency			200KHz typical

Operating temperature	Free air	Industrial level	-25℃ ~ +55℃
Storage temperature			-40℃ ~ +125℃
Relative humidity			10%~90%
case material			Metal case
Isolation Voltage	Input-Output		1500VDC
	Input-Case		500VDC
	Output-Case		500VDC
Temperature Coefficient			≤±0.05%/℃
Cooling			Natural Convection,or add heatsink
MTBF	5X10 ⁵ Hrs		

Product Nomination Method


example	L D 150 E - 48 S 05 ① ② ③ ④ ⑤ ⑥ ⑦						
①	Wide input voltage: 2: 1			⑥ ⑦	S=Single route output, D=Dual route output, T=Triple route output, Q=Quadruple output		
②	Power adaptation mode: D (DC-DC)						
③	Output power(W)						
④	Vehicle power supply				output voltage		
⑤	Normal input voltage						

Product Program

PART #	Input voltage range	Output voltage / current					
		VO1		VO2		VO3	
		V	A	V	A	V	A
LD150E-12S05	12V(9~18V)	5V	30A				
LD150E-12S12		12V	12.5A				
LD150E-12S15		15V	10A				
LD150E-12S24		24V	6.25A				
LD150E-12S28		28V	5.36A				
LD150E-12S48		48V	3.13A				
LD150E-24S05	24V(18~36V)	5V	30A				
LD150E-24S12		12V	12.5A				

LD150E-24S15		15V	10A				
LD150E-24S24		24V	6.25A				
LD150E-24S28		28V	5.36A				
LD150E-24S48		48V	3.13A				
LD150E-48S05	48V(36~72V)	5V	30A				
LD150E-48S12		12V	12.5A				
LD150E-48S15		15V	10A				
LD150E-48S24		24V	6.25A				
LD150E-48S28		28V	5.36A				
LD150E-48S48		48V	3.13A				
LD150E-110S05	110V(72~144V)	5V	30A				
LD150E-110S12		12V	12.5A				
LD150E-110S15		15V	10A				
LD150E-110S24		24V	6.25A				
LD150E-110S28		28V	5.36A				
LD150E-110S48		48V	3.13A				

Mechanical Dimension

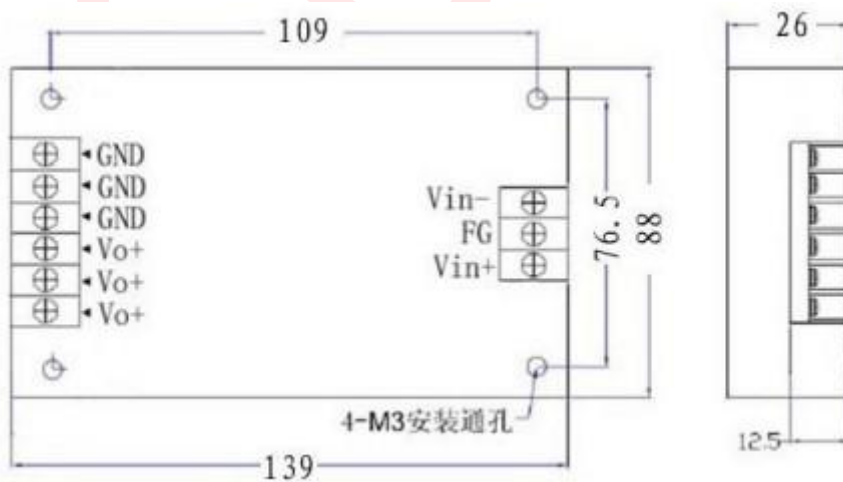

BOTTOM VIEW

Mechanical Data

WATT	L x W x H	Packing No.
150W	139*88*26mm	A

*Note: The power modules such as the definition of the pin does not match with the hand book, please refer to the actual item.

ECCOELEC