

Typical Performance

FEATURES

- Wide input voltage range
- Typical efficiency :82%
- Switching frequency: 100KHz
- Overcurrent/Short circuit protection,Self-furbish
- Input-output isolate
- PCB board in-line type installs
- metal case



3-Years Product Warranty

Technology parameter

Test condition:General Nominal Line,Tc=25℃, Rated resistant load unless other wisespecified

Input Feature	Min	Nom	Max	Notes
Input voltage (Vac)	165(200Vdc)	220	265(380Vdc)	N
	85(120Vdc)	220	265(380Vdc)	W
Frequency range (Hz)	47		440	
Remote ON/OFF				NONE

Output Feature

Voltage accuracy		Vo1; Vo2	±1.0%, ±3.0%
Line regulation	Nominal load,full voltage input range	Vo1; Vo2	±0.1%; ±1.5%
Load regulation	Nominal input voltage,20% ~ 100% Nominal load	Vo1; Vo2	±0.5%; ±3.0%
Ripple and noise	20MHz BM,test by 20M oscillograph		≤1%Vo
Peak deviation	25% Rated Load Vary	ΔVo1/ Vo1	≤±5.0%
Dynamic response setting time			≤200us

General Feature

Efficiency			82% typical
Switching frequency			100KHz
Operating temperature			-20℃ ~ +55℃
Storage temperature			-40℃ ~ +105℃
Max case temperature			+90℃

Relative humidity			10%~90%
case material			Metal case
Isolation voltage		Input-Output	2500Vac/1min
		Input-Case	2500Vac/1min
		Output-Case	500Vac/1min
Temperature coefficient			$\leq \pm 0.03\%/^{\circ}\text{C}$
Cooling			Natural convection
MTBF	BELLCORE TR332, (25 $^{\circ}\text{C}$)		2X10 ⁵ Hrs

NOTE:

(1)The 3-15W module working environment temperature more than 55 $^{\circ}\text{C}$ need derating use (- 0.6W/ $^{\circ}\text{C}$ for 30W, - 0.86W/ $^{\circ}\text{C}$ for 50W), but the max shell temperature shall not be more than 90 $^{\circ}\text{C}$.

(2)Capacitive load:

The output of the module can be applied electrolytic capacitor, but too much capacity and low ESR may cause the module instability, or cause current limiting point become low,we recommend 100 uF/A of the output capacitance , the current is rated output current.

Product Nomination Method

example	L A 25 - 220 S 05 J ① ② ③ ④ ⑤ ⑥ ⑦						
①	Wide input voltage range: AC85-265V Narrow input voltage range: AC165-265V			⑤	S=Single route output, D=Dual route output, T=Triple route output, Q=Quadruple output		
②	Power adaptation mode: A（AC-DC）			⑥	output voltage		
③	Output power(W)			⑦	I: Dual output isolated		
④	Normal input voltage				J:Military level		

Product Program


PART #	Input voltage range	Output voltage / current					
		VO1		VO2		VO3	
		V	mA	V	mA	V	mA
LA40-220S05	220V(85~265VAC) 120~380VDC	5V	8000mA				
LA40-220S09		9V	4444mA				
LA40-220S12		12V	3300mA				
LA40-220S15		15V	2670mA				
LA40-220S24		24V	1700mA				
LA40-220D05		+5V	4000mA	-5V	4000mA		

LA40-220D12		+12V	1700mA	-12V	1700mA		
LA40-220D15		+15V	1333mA	-15V	1333mA		
LA40-220D24		+24V	820mA	-24V	820mA		

*NOTE:

The output ripple noise (peak value) measurement, please reference module test instructions.


Mechanical Dimension

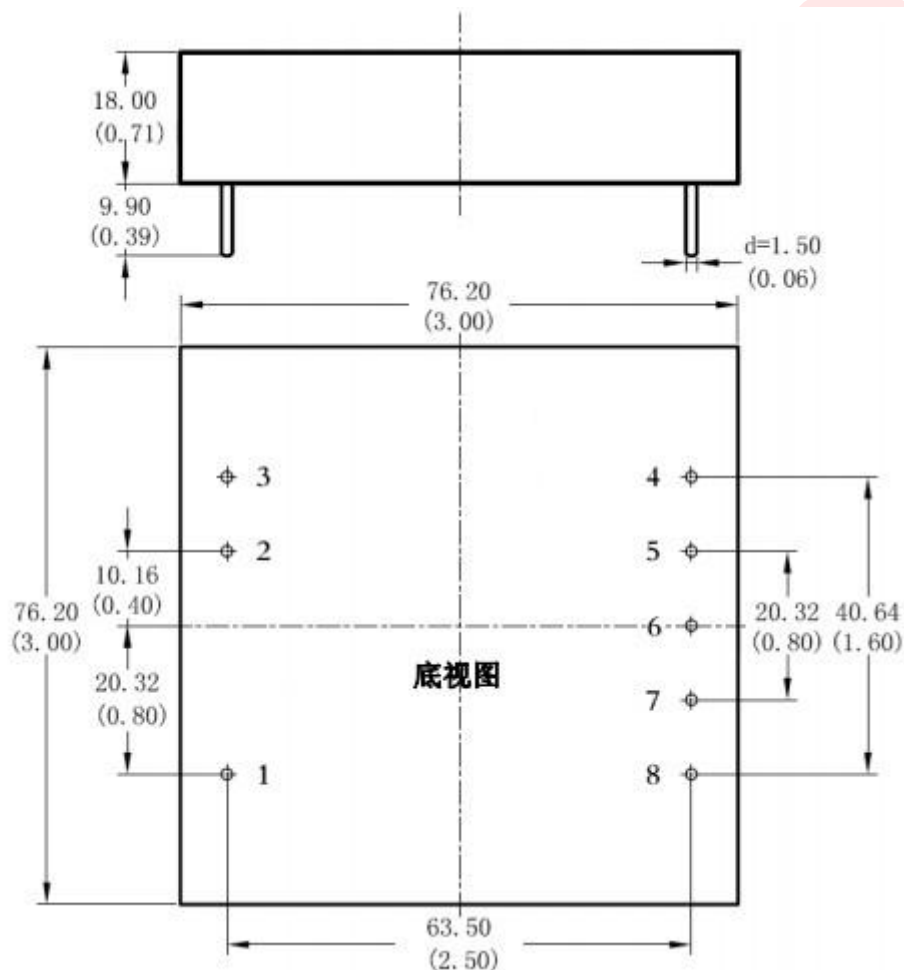

BOTTON VIEW

UNIT:mm(inch)

Temperature Curve

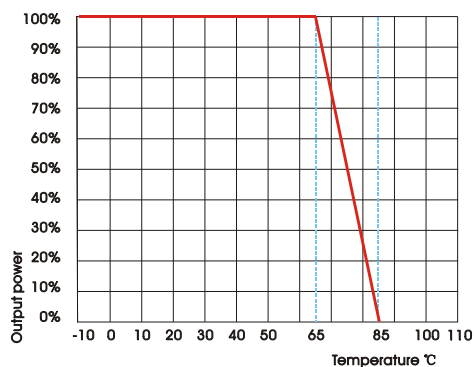

Mechanical Data										
WATT			L x W x H					Packing No.		
40W			76.2×76.2×18.0mm(3*3*0.7inch)							
Pin Assignment										
PIN	1	2	3	4	5	6	7	8		
Single O/P	FG	N	L	Vo1	GND	+S	TRIM	-S		
Note: The power modules such as the definition of the pin does not match with the hand book,please refer to the actual item.										