

Typical Performance

FEATURES

- Wide Input voltage range (2:1)
- Typical Efficiency:85%
- Switching frequency: 300KHz
- Output Over current protect,Short circuit protection
- input under voltage protection,output over voltage protection
- input-output isolated
- PCB Board in-line type installs
- High reliability
- Optional heat sink



3-Years Product Warranty

Technology parameter

Test condition:General Nominal Line,Tc=25℃, Rated resistant load unless other wisespecified

Input Features	Min	Nom	Max	Notes
	Test condition			
Start voltage	96V(65~150Vin)			65V
	110V(82~180Vin)			82V
Input under voltage protection	96V(65~150Vin)			60V
	110V(82~180Vin)			70V
Input voltage (Vdc)	65	96	150	W 2:1
	82	110	180	W 2:1
Start time	Not capacitive load			20mS

Remote On/Off Function

CTL	CNT Pin connect -Vin			ON
	CNT Pin left open			OFF

Output Feature

	Test condition		
--	----------------	--	--

Voltage accuracy	$I_o=0.1 \dots 1.0 \times I_{onom}, V_i=V_{rated}$		$\pm 1.0\%$
Line regulation	$V_{imin} \leq V_i \leq V_{imax}$		$\pm 0.2\%$
Load regulation	$I_o=0.1 \dots 1.0 \times I_{onom}, V_{imin} \leq V_i \leq V_{imax}, V_i=V_{rated}$		$\pm 0.5\%$
Ripple&noise	2-MHz Broadband		1%
Over current protection	$V_{imin} \leq V_i \leq V_{imax}$		120%
Peak Deviation	25% Rated Load Vary		$\pm 5.0\%$
Dynamic Response Setting Time			400us
Output Voltage Trim	$V_{imin} \leq V_i \leq V_{imax}$		10%
Switching frequency	$V_{imin} \leq V_i \leq V_{imax}$		300KHz

General Feature

	Test condition		
Efficiency			85% typical
Board temperature	Industry level		-25℃ ~ +55℃
Working environment temperature	Military level		-25℃ ~ +85℃
Max Board temperature	Industry level		+85℃
	Military level		+105℃
Storage temperature	Industry level		-40℃ ~ +105℃
	Military level		-50℃ ~ +105℃
Relative humidity	No condensation		5%~90%RH
Temperature coefficient			±0.02%/℃
case material			aluminium baseplate
Isolated resistance	Input-Output		100M ohm
Vibration resistance	10~55Hz		5G
Over current mode	Full input range	Protection type : Hiccup mode, recovers automatically	
Cooling		Heatsink,nature cooling	
Case material		epoxy,Aluminum base plate	
Isolated Voltage	Input-output 1500Vdc; input-FG 1500Vdc,Output-FG 500Vdc		
MTBF	MIL-HDBK-217F2		5X10 ⁶ Hrs

Product Nomination Method



example	L D 200 – H 48 S 12 ① ② ③ ④ ⑤ ⑥ ⑦		
①	Wide input voltage: 2: 1	④	H:high voltage input
②	Power adaptation mode: D（DC-DC）	⑤	Normal input voltage
③	Output power(W)	⑥	S=Single route output
⑦	output voltage		

Product Program


PART #	Input voltage range	Output voltage / current				
		VO1		VO2		Typical Efficiency
		V	A	V	A	%
LD600H-96S24	96V(65~150V)	24V	25A			89
LD600H-96S28		28V	21.4A			89
LD600H-96S48		48V	12.5A			89
LD600H-110S24	110V(82~180V)	24V	25A			89
LD600H-110S28		28V	21.4A			89
LD600H-110S48		48V	12.5A			89

Recommended Circuit

Rated voltage	Fuse	voltage dependent resistor	rectifier bridge	NTC	C1C2C3	CY1CY2CY3	E1
110V	20A	300V	40A	4 Ω /Φ20	105/200V	472/3KV	1000 μ F/200V
220V	10A	560V	20A	5 Ω /Φ20	105/400V	472/3KV	1000 μ F/400V

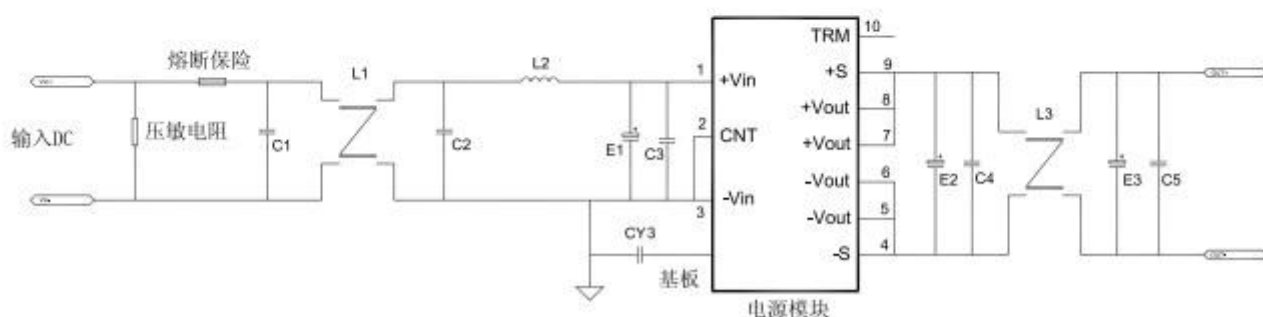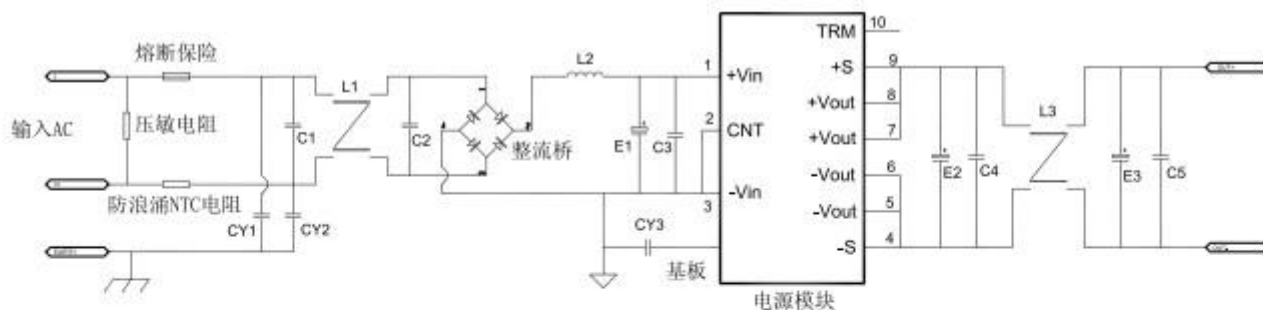


TRIM

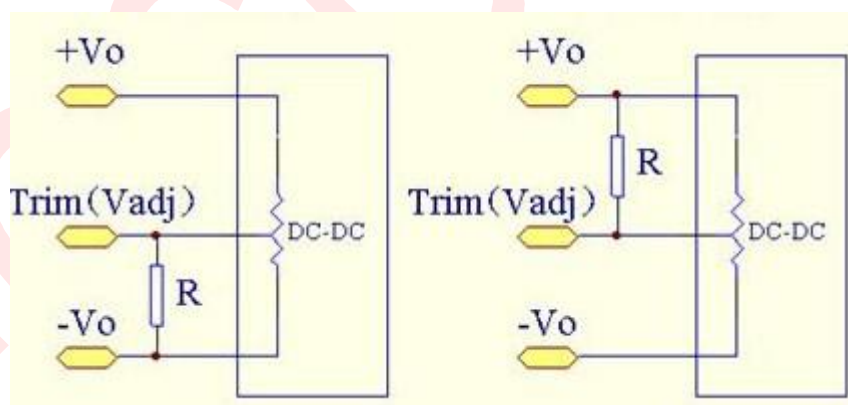


Raise output voltage

Low output voltage


Input voltage--Efficiency

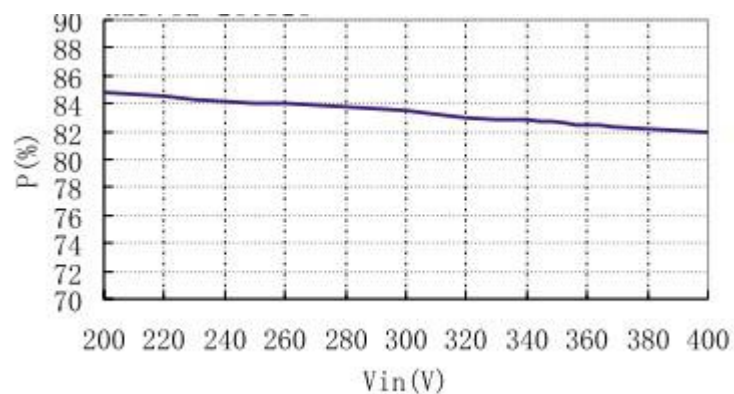


Output Load--Efficiency

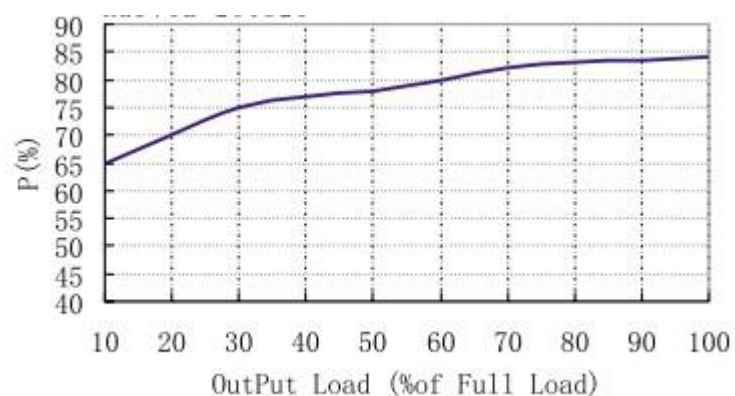

Temperature Curve

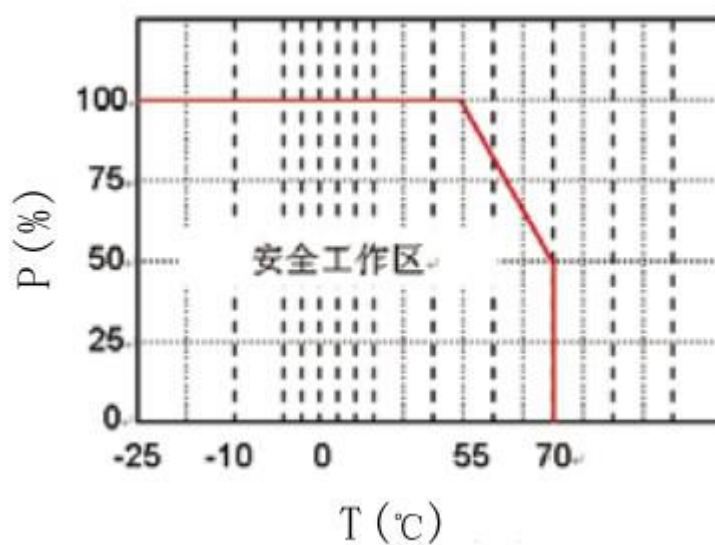

Mechanical Dimension

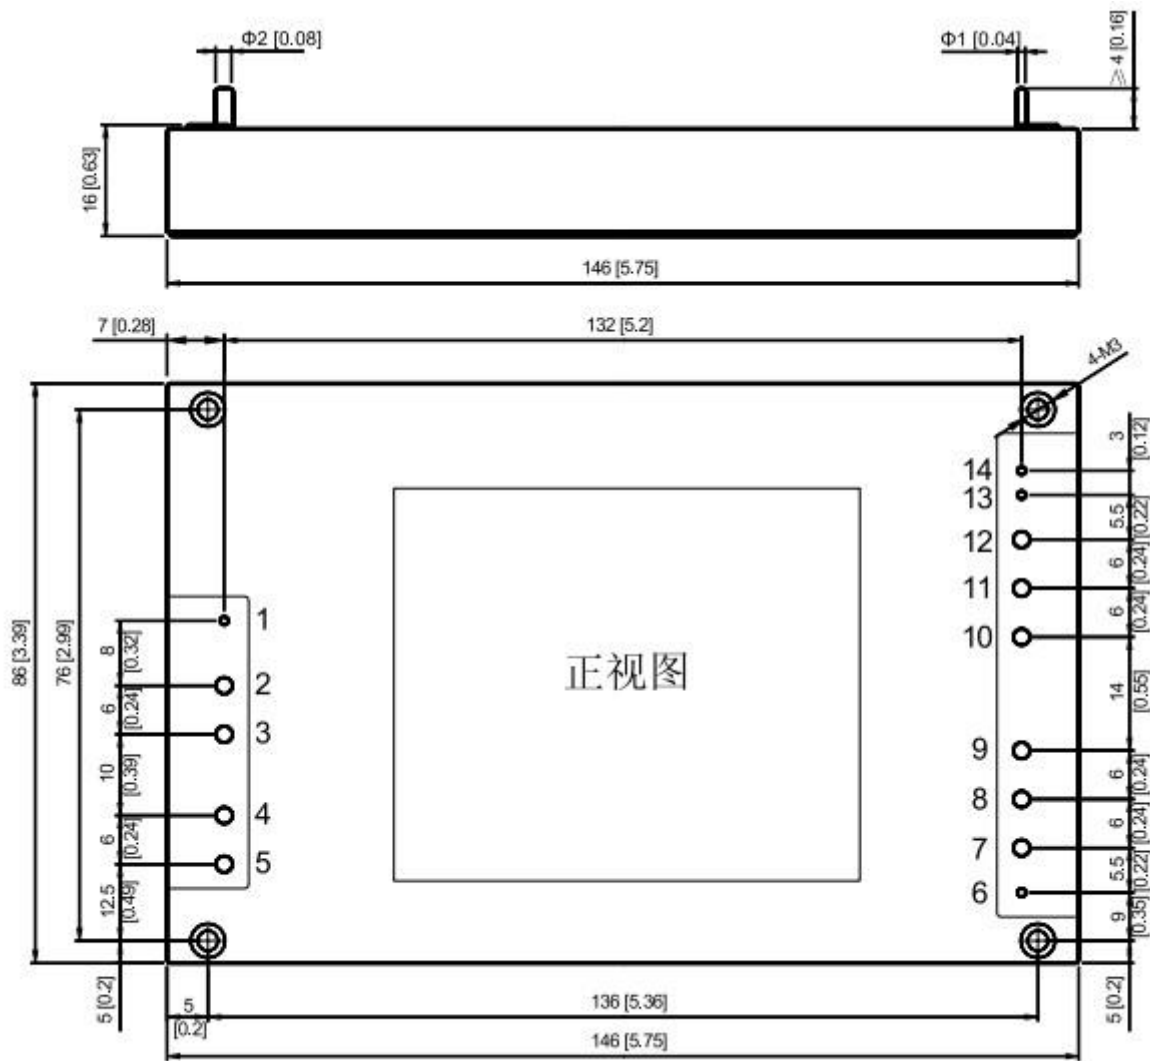

BOTTOM VIEW

Unit:mm(inch)

Tolerance:±0.2mm(±0.008inch)

Mechanical Data

WATT	L x W x H	Packing No.
600W	146*86*16mm	

Pin Assignment

Pin	1	2	3	4	5	6	7	8	9	10	11	12	13	14
Single O/P	CTL	-Vin	-Vin	+Vin	+Vin	+S	+Vout	+Vout	+Vout	-Vout	-Vout	-Vout	-S	TRIM

*Note: The power modules such as the definition of the pin does not match with the hand book,please refer to the actual item.