

Typical Performance

FEATURES

- Wide Input voltage range
- Typical efficiency : 80%
- Switching frequency: 60 KHz
- Overcurrent/Short circuit protection,Self-furbish
- Input-output isolate
- PCB board in-line type installs
- Plastic/Metal case



3-Years Product Warranty

Technology parameter

Test condition:General Nominal Line,Tc=25℃ , Rated resistant load unless other wispecified

Input feature	Min	Nom	Max	Notes
Input voltage (Vac)	85(120Vdc)	400	550(380Vdc)	W
Frequency range(HZ)	47		440	
Remote ON/OFF				NONE

Output Feature

Voltage accuracy		Vo1; Vo2, Vo3;	±1.0%, ±3.0%
Line regulation	Nominal load,full voltage input range	Vo1; Vo2, Vo3;	±0.2%(3-15W); ±1.5%
			±0.1%(20-30W); ±1.5%
Load regulation	Nominal input Voltage,20% ~ 100% Nominal load	Vo1; Vo2, Vo3;	±0.5%; ±3.0%
Ripple and noise	20MHz BM,test by 20M oscillograph		≤1%Vo
Peak deviation	25% Rated load vary	ΔVo1/ Vo1	≤±5.0%
Dynamic response setting time			≤200us

General Feature

Efficiency			80% typical
Switching frequency		below 10W: 60 KHz	100KHz
Operating temperature		3-15W	-20℃ ~ +70℃

		20-30W	-20℃ ~ +55℃
Storage temperature			-40℃ ~ +105℃
Max case temperature			+90℃
Relative humidity			10%~90%
case material			Plastic/Metal case
Isolation voltage		Input-Output	2000Vac/1min
		Input-Case	2000Vac/1min
		Output-Case	500Vac/1min
Temperature coefficient			≤±0.03%/℃
Cooling			Natural Convection
MTBF	BELLCORE TR332, (25℃)		2X10 ⁵ Hrs

NOTE:

(1)The 3-15W module working environment temperature more than 70 ℃ need derating use (- 0.15W/℃ for 3W, - 0.25W/℃ for 5W, - 0.5W/℃ for 10W, - 0.75W/℃ for 15W),the 20-30W more than 55 ℃ need derating use(- 0.6W/℃ for 20W, - 0.86W/℃ for 30W), but the max shell temperature shall not be more than 90 ℃.

(2)Capacitive load:

The output of the module can be applied electrolytic capacitor, but too much capacity and low ESR may cause the module instability, or cause current limiting point become low,we recommend 100 uF/A of the output capacitance , the current is rated output current.

Product Nomination Method

example	L A 25 - 4000 S 05 J ① ② ③ ④ ⑤ ⑥ ⑦						
①	Wide input voltage range: AC165-550V				⑤	S=Single route output, D=Dual route output, T=Triple route output, Q=Quadruple output	
②	Power adaptation mode: A (AC-DC)				⑥	output voltage	
③	Output power(W)				⑦	I: Dual output isolated	
④	Normal input voltage					J:Millitary level	


Product Program

PART #	Input voltage range	Output voltage / current					
		VO1		VO2		VO3	
		V	mA	V	mA	V	mA
LA3-400S05	400V (85~550VAC)	5V	600mA				
LA3-400S12		12V	250mA				
LA3-400S15		15V	200mA				
LA3-400S24		24V	125mA				
LA3-400S48		48V	62.5mA				

***NOTE:**


The output ripple noise (peak value) measurement, please reference module test instructions.

Mechanical Dimension

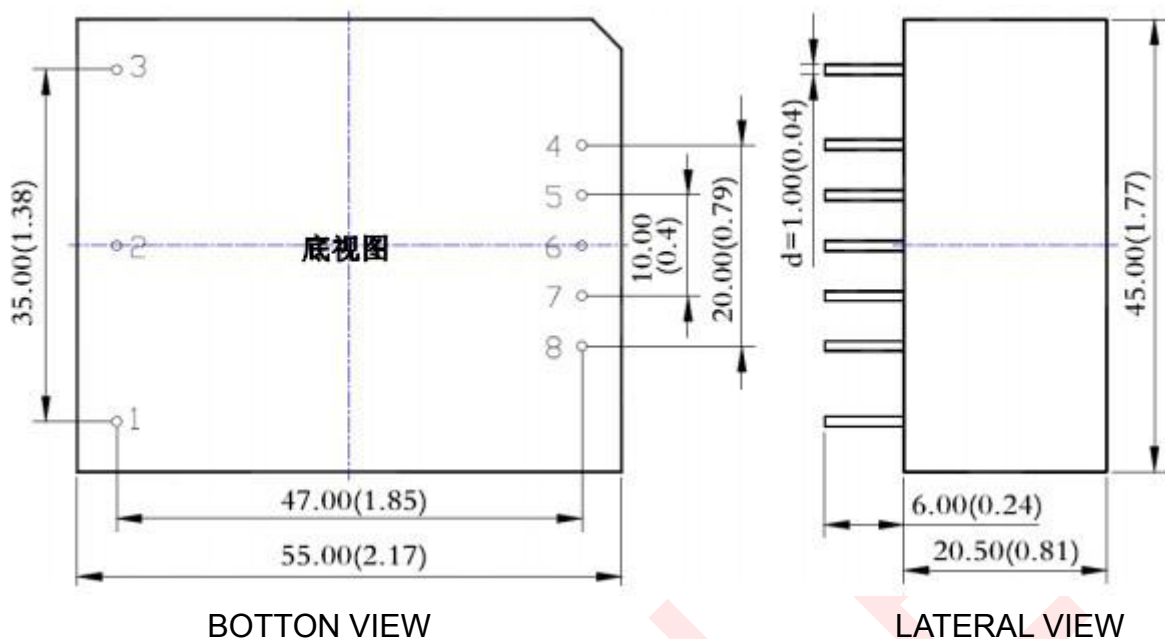

UNIT:mm(inch)

Temperature Curve

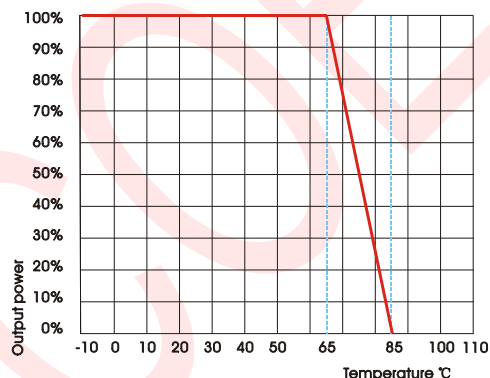

Mechanical Data

WATT	L x W x H	Package
3W	55.0 x 45.0 x 20.5mm(2.17*1.77*0.8inch)	

Pin Assignment

PIN	1	2	3	4	5	6	7	8		
Single O/P	FG	AC(N)	AC(L)	+Vo	NP	NP	NP	GND		

Note: The power modules such as the definition of the pin does not match with the hand book, please refer to the actual item.