

Typical Performance

FEATURES

- Wide Input voltage range
- Typical efficiency : 80%
- Switching frequency: 60 KHz
- Overcurrent/Short circuit protection,Self-furbish
- Input-output isolate
- PCB board in-line type installs
- Plastics case



3-Years Product Warranty

Technology parameter Test condition:General Nominal Line,Tc=25℃, Rated resistant load unless other wisepecified

Input feature	Min	Nom	Max	Notes
Input voltage (Vac)	165(200Vdc)	220	265(380Vdc)	N
	85(120Vdc)	220	265(380Vdc)	W
Frequency range(HZ)	47		440	
Remote ON/OFF				NONE

Output Feature

Voltage accuracy		Vo1; Vo2, Vo3;	±1.0%, ±3.0%
Line regulation	Nominal load,full voltage input range	Vo1; Vo2, Vo3;	±0.2%(3-15W); ±1.5%
			±0.1%(20-30W); ±1.5%
Load regulation	Nominal input Voltage,20% ~ 100% Nominal load	Vo1; Vo2, Vo3;	±0.5%; ±3.0%
Ripple and noise	20MHz BM,test by 20M oscillograph		≤1%Vo
Peak deviation	25% Rated load vary	ΔVo1/ Vo1	≤±5.0%
Dynamic response setting time			≤200us

General Feature

Efficiency			80% typical
Switching frequency		below 10W: 60 KHz	100KHz
Operating temperature			-20℃ ~ +55℃

Storage temperature			-40℃ ~ +105℃
Max case temperature			+90℃
Relative humidity			10%~90%
case material			Plastics case
Isolation voltage		Input-Output	2500Vac/1min
		Input-Case	2500Vac/1min
		Output-Case	500Vac/1min
Temperature coefficient			≤±0.03%/℃
Cooling			Natural Convection
MTBF	BELLCORE TR332, (25℃)		2X10 ⁵ Hrs

NOTE:

(1)The 3-15W module working environment temperature more than 70 ℃ need derating use (- 0.15W/℃ for 3W, - 0.25W/℃ for 5W, - 0.5W/℃ for 10W, - 0.75W/℃ for 15W),the 20-30W more than 55 ℃ need derating use(- 0.6W/℃ for 20W, - 0.86W/℃ for 30W), but the max shell temperature shall not be more than 90 ℃.

(2)Capacitive load:

The output of the module can be applied electrolytic capacitor, but too much capacity and low ESR may cause the module instability, or cause current limiting point become low,we recommend 100 uF/A of the output capacitance , the current is rated output current.

Product Nomination Method

example	L A 25 – 220 S 05 J							
	①	②	③		④	⑤	⑥	⑦
①	Wide input voltage range: AC85-265V Narrow input voltage range: AC165-265V				⑤	S=Single route output, D=Dual route output, T=Triple route output, Q=Quadruple output		
②	Power adaptation mode: A（AC-DC）				⑥	output voltage		
③	Output power(W)				⑦	I: Dual output isolated		
④	Normal input voltage					J:Millitary level		

Product Program


PART #	Input voltage range	Output voltage / current					
		VO1		VO2		VO3	
		V	mA	V	mA	V	mA
LA3-220S05A	220V(85~265VAC) 120~380VDC	5V	600mA				
LA3-220S09A		9VA	333mA				
LA3-220S12A		12V	250mA				
LA3-220S15A		15V	200mA				
LA3-220S24A		24V	125mA				
LA3-220S48A		48V	60mA				
LA3-220D05A		+5V	300mA	-5 V	300mA		
LA3-220D12A		+12V	125mA	-12V	125mA		

LA3-220D15A		+15V	100mA	-15V	100mA		
LA3-220D24A		+24V	62.5mA	-24V	62.5mA		
LA3-220D48A		+48V	30mA	-48V	30mA		

*NOTE:

The output ripple noise (peak value) measurement, please reference module test instructions.

Mechanical Dimension

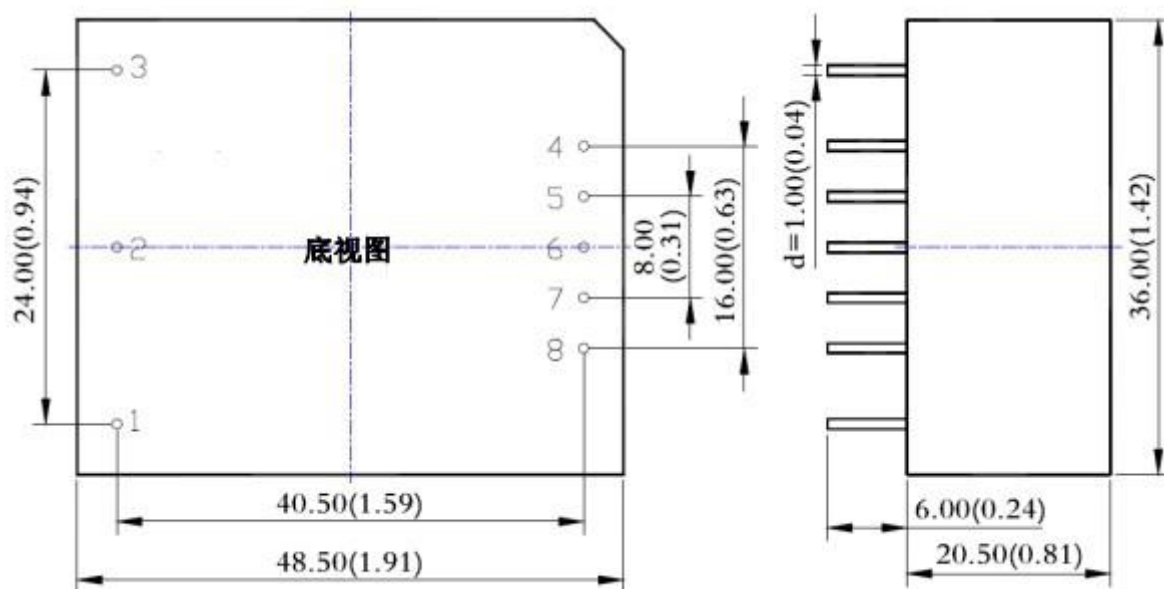


BOTTON VIEW

LATERAL VIEW

UNIT:mm(inch)

Temperature Curve

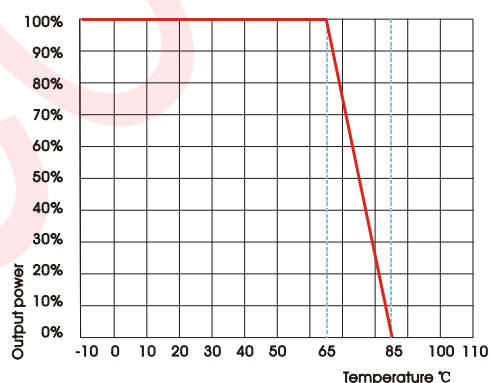

Mechanical Data

WATT	L x W x H	Package
3W	48.5 x 36.0 x 20.5mm(2.16*1.77*0.8inch)	A

Pin Assignment

PIN	1	2	3	4	5	6	7	8		
Single O/P	FG	AC(N)	AC(L)	+Vo	NP	NP	NP	GND		

Dual O/P	FG	AC(N)	AC(L)	+Vo1	NP	COM	NP	-Vo2		
Dual O/P Isolation	FG	AC(N)	AC(L)	+Vo2	GND2	NP	+Vo1	GND1		
Triple O/P	FG	AC(N)	AC(L)	+Vo2	COM	-Vo2	+Vo1	GND1		

Note: The power modules such as the definition of the pin does not match with the hand book, please refer to the actual item.