

Typical Performance

FEATURES

- Wide input voltage range
- Typical efficiency : 80%
- Switching frequency: 60 KHz
- Overcurrent/Short circuit protection,Self-furbish
- Input-output isolate
- PCB board in-line type installs
- Metal case



3-Years Product Warranty

Technology parameter Test condition:General Nominal Line,Tc=25°C , Rated resistant load unless other wispecified

Input feature	Min	Nom	Max	Notes
Input voltage (Vac)	165(200Vdc)	220	265(380Vdc)	N
	85(120Vdc)	220	265(380Vdc)	W
Frequency range(HZ)	47		440	
Remote ON/OFF				NONE

Output Feature

Voltage accuracy		Vo1; Vo2, Vo3;	±1.0%, ±3.0%
Line regulation	Nominal load,full voltage input range	Vo1; Vo2, Vo3;	±0.2%(3-15W); ±1.5%
			±0.1%(20-30W); ±1.5%
Load regulation	Nominal input Voltage,20% ~ 100% Nominal load	Vo1; Vo2, Vo3;	±0.5%; ±3.0%
Ripple and noise	20MHz BM,test by 20M oscillograph		≤1%Vo
Peak deviation	25% Rated load vary	ΔVo1/ Vo1	≤±5.0%
Dynamic response setting time			≤200us

General Feature

Efficiency			80% typical
Switching frequency		below 10W: 60 KHz	100KHz
Operating temperature		3-15W	-20°C ~ +55°C
Storage temperature			-40°C ~ +105°C

Max case temperature			+90℃
Relative humidity			10%~90%
case material			Metal case
Isolation voltage		Input-Output	3000Vac/1min
		Input-Case	1500Vac/1min
		Output-Case	500Vac/1min
Temperature coefficient			≤±0.03%/℃
Cooling			Natural Convection
MTBF	BELLCORE TR332, (25℃)		2X10 ⁵ Hrs

NOTE:

(1)The 3-15W module working environment temperature more than 70 ℃ need derating use (- 0.15W/℃ for 3W, - 0.25W/℃ for 5W, - 0.5W/℃ for 10W, - 0.75W/℃ for 15W),the 20-30W more than 55 ℃ need derating use(- 0.6W/℃ for 20W, - 0.86W/℃ for 30W), but the max shell temperature shall not be more than 90 ℃ .

(2)Capacitive load:

The output of the module can be applied electrolytic capacitor, but too much capacity and low ESR may cause the module instability, or cause current limiting point become low,we recommend 100 uF/A of the output capacitance , the current is rated output current.

Product Nomination Method

example	L A 25 - 220 S 05 J						
	①	②	③	④	⑤	⑥	⑦
①	Wide input voltage range: AC85-265V Narrow input voltage range: AC165-265V				⑤	S=Single route output, D=Dual route output, T=Triple route output, Q=Quadruple output	
②	Power adaptation mode: A (AC-DC)				⑥	output voltage	
③	Output power(W)				⑦	I: Dual output isolated	
④	Normal input voltage					J: Military level	

Product Program


PART #	Input voltage range	Output voltage / current					
		VO1		VO2		VO3	
		V	mA	V	mA	V	mA
LA5-220S3V3D	220V(85~265VAC) 120~380VDC	3.3V	1500mA				
LA5-220S05D		5V	1000mA				
LA5-220S09D		5V	556mA				
LA5-220S12D		12V	420mA				
LA5-220S15D		15V	330mA				
LA5-220S24D		24V	210mA				
LA5-220S48D		48V	60mA				
LA5-220D05D		+5V	500mA	-5V	500mA		
LA5-220D12D		+12V	210mA	-12V	210mA		

LA5-220D15D		+15V	165mA	-15V	165mA		
LA5-220D24D		+24V	100mA	-24V	100mA		
LA5-220D48D		+48V	50mA	-48V	50mA		
LA5-220T5-12ID		+5V	500mA	+12V	100 mA	-12V	100mA

*NOTE:

The output ripple noise (peak value) measurement, please reference module test instructions.

Mechanical Dimension

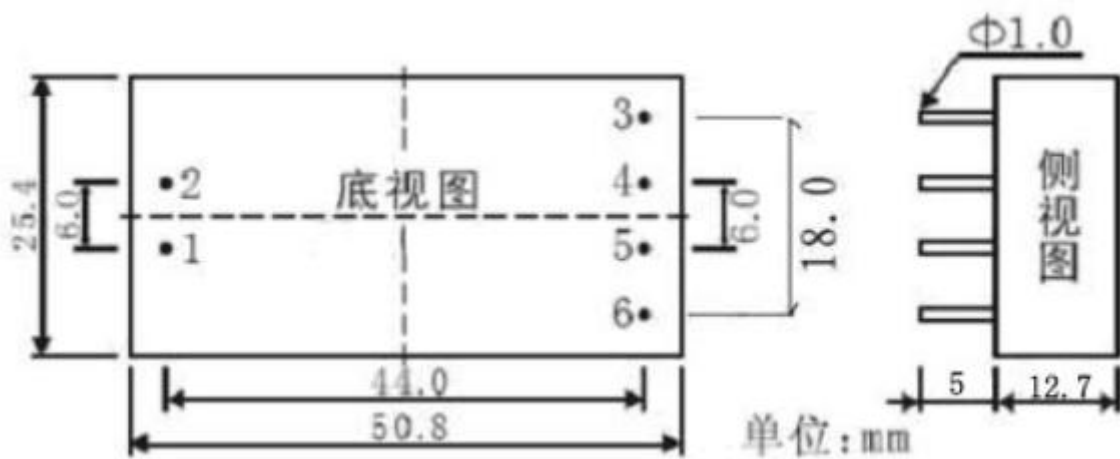


BOTTON VIEW

LATERAL VIEW

UNIT:mm

Temperature Curve

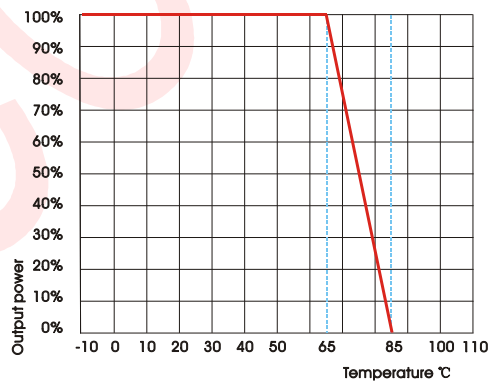

Mechanical Data

WATT	L x W x H	Package
5W	50.8 x 25.4x 12.7mm(2*1*0.5inch)	D

Pin Assignment

PIN	1	2	3	4	5	6				
Single O/P	AC(L)	AC(N)	+Vo	NP	NP	GND				

Dual O/P	AC(L)	AC(N)	+Vo1	COM	COM	-Vo2				
Dual Isolation O/P	AC(L)	AC(N)	+Vo1	GND1	+Vo2	GND2				

Note: The power modules such as the definition of the pin does not match with the hand book, please refer to the actual item.

ECCOELEC