

Typical Performance

FEATURES

- Wide Input voltage range (2:1)
- Typical Efficiency:85%
- Switching frequency: 300KHz
- Output Over current protect,Short circuit protection
- input under voltage protection,over voltage protection
- input-output isolated
- PCB Board in-line type installs
- High reliability
- Optional heat sink



3-Years Product Warranty

Technology parameter Test condition:General Nominal Line,Tc=25℃, Rated resistant load unless other wispecified

Input Features	Min	Nom	Max	Notes
	Test condition			
Start voltage	110V(72~144V)			110V
Input under voltage protection	110V(72~144V)			110V
Input voltage (Vdc)	72	110	144	
Start time	Not capacitive load			20mS

Remote On/Off Function

CTL	CNT Pin connect -Vin			OFF
	CNT Pin left open			ON

Output Feature

	Test condition		
Voltage accuracy	Io=0.1...1.0xIonom,Vi=Vrated		±1.0%

Line regulation	$V_{min} \leq V_i \leq V_{max}$		$\pm 0.2\%$
Load regulation	$I_o = 0.1 \dots 1.0 \times I_{nom}, V_{min} \leq V_i \leq V_{max}, V_i = V_{rated}$		$\pm 0.5\%$
Ripple & noise	2-MHz Broadband		1%
Over current protection	$V_{min} \leq V_i \leq V_{max}$		120%
Peak Deviation	25% Rated Load Vary		$\pm 5.0\%$
Dynamic Response Setting Time			400us
Output Voltage Trim	$V_{min} \leq V_i \leq V_{max}$		10%
Switching frequency	$V_{min} \leq V_i \leq V_{max}$		300KHz

General Feature

	Test condition		
Efficiency			85% typical
Board temperature	Industry level		-25℃ ~ +55℃
Working environment temperature	Military level		-25℃ ~ +85℃
Max Board temperature	Industry level		+85℃
	Military level		+105℃
Storage temperature	Industry level		-40℃ ~ +105℃
	Military level		-50℃ ~ +105℃
Relative humidity	No condensation		5%~90%RH
Temperature coefficient			±0.02%/℃
case material			aluminium baseplate
Isolated resistance	Input-Output		100M ohm
Vibration resistance	10~55Hz		5G
Over current mode	Full input range	Protection type : Hiccup mode, recovers automatically	
Cooling		Heatsink,nature cooling	
Case material		epoxy,Aluminum base plate	
Isolated Voltage	Input-output 1500Vdc; input-FG 1500Vdc,Output-FG 500Vdc		
MTBF	MIL-HDBK-217F2		5X10 ⁶ Hrs

Product Nomination Method


example	L D 200 – T 48 S 12			① ② ③ ④ ⑤ ⑥ ⑦		
①	Wide input voltage: 2: 1			④	T: full brick package	

②	Power adaptation mode: D (DC-DC)	⑤	Normal input voltage
③	Output power(W)	⑥	S=Single route output
⑦	output voltage		

Product Program

PART #	Input voltage range	Output voltage / current					
		VO1		VO2		VO3	
		V	A	V	A	V	A
LD200T-72S12	72V(50~120V)	12	16.7				
LD200T-72S15		15	13.3				
LD200T-72S24		24	8.3				
LD200T-72S28		28	7.1				
LD200T-72S36		36	5.56				
LD200T-72S48		48	4.2				
LD200T-110S12	110V(72~144V)	12	16.7				
LD200T-110S15		15	13.3				
LD200T-110S24		24	8.3				
LD200T-110S28		28	7.1				
LD200T-110S36		36	5.56				
LD200T-110S48		48	4.2				

Mechanical Dimension

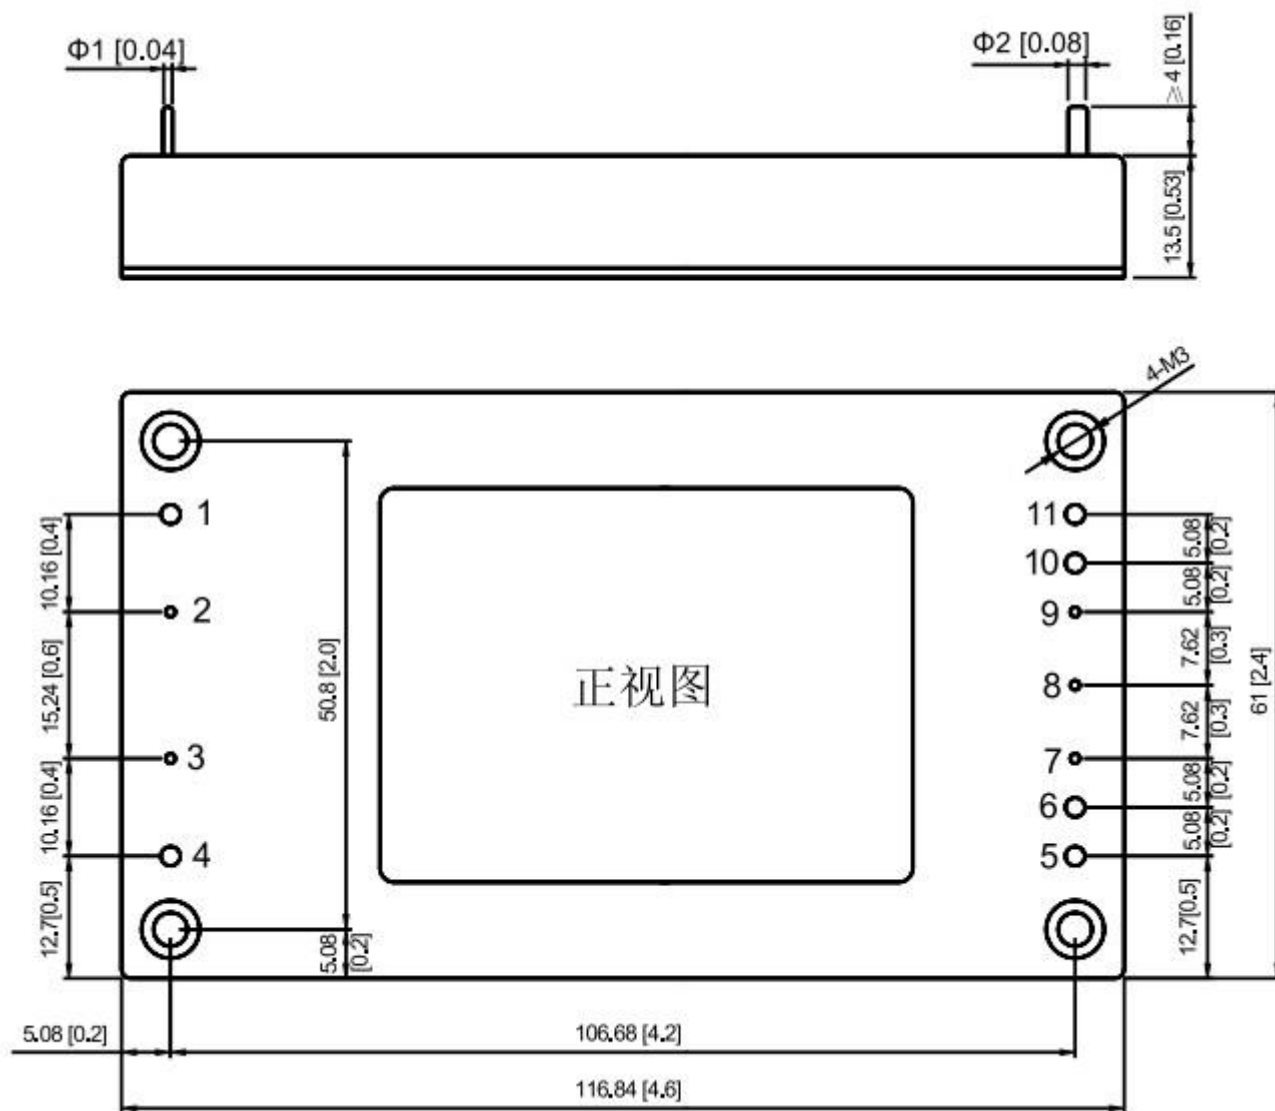

BOTTOM VIEW

Unit:mm(inch)

Tolerance: $\pm 0.2\text{mm}(\pm 0.008\text{inch})$

Mechanical Data

WATT	L x W x H	Packing No.
200W	116.84*61*13.5mm	

Pin Assignment

Pin	1	2	3	4	5	6	7	8	9	10	11	
Single O/P	-Vin	CASE	REM	+Vin	+Vout	+Vout	+S	TRIM	-S	-Vout	-Vout	

*Note: The power modules such as the definition of the pin does not match with the hand book, please refer to the actual item.